

A black rectangular device with a flip-up cover. The cover is open, revealing a small screen and some internal components. The main body has a textured surface and a small circular hole near the bottom. A black strap with two silver buttons is attached to the bottom of the main body.

# USER GUIDE

v1.0

## *Smart Key Box-S2*

# OMUARK

By OmfocusTech

[www.omuark.com](http://www.omuark.com)

Thank you for choosing our products.

More questions contact us at [contact@omuark.com](mailto:contact@omuark.com)



Wall-Mounted model



Portable model



Car-Mounted model



Touch key pad

Emergency USB-C port



Shackle Switch (for models with portable shackle)

Key hanger

4 Mounting screw holes

Battery holder

### Includes:



NFC card sticker  
1 PCS



Wall mounting screw  
4 PCS



Screw driver  
1 PCS



Reset Tool  
1 PCS



## Features

Bluetooth

Dimension 155 x 80 x 56mm

Weight 0.8Kg

Aluminium alloy + Tempered Glass

Touch keyboard

Smart APP management

Fingerprint (Optional Model)

NFC unlock (smartphone or watch unlock)

4 X AAA batteries, 12 months life

Emergency USB-C

OTA Updates

Wall-mounted or Portable / Car-Mounted



NFC

### NFC card settings

1. Scan the NFC card sticker to Google wallet or apple wallet on the phones, and save it as a virtual card.
2. Alternatively, put the NFC card sticker on behind of the phones directly, to use the NFC unlock function

# Local function settings

## Getting Started

- >Open Key Box and remove the 4 screws to open the battery lid.
- >Insert 4 AAA batteries

## Important Settings

Please restore the device to factory mode **before** using, use the reset tool to press and hold the reset button 5-10 seconds until you hear a long beep. And change the initial admin Code, the Initial admin code is 123456. *All code length must have at least 6 digits.*

>Tap \* + 0 + \* + initial admin password + # + new admin password + # + new admin password + #

## Add User Password

>Tap \* + 1 + \* + admin password + # + new user password + # + new user password + #

## Delete User Password

>Tap \* + 2 + \* + admin password + # + user password to be deleted + # + user password to be deleted + #

## Delete All User Password

>Tap \* + 00000 + \* + admin password + #


## Local Restore factory settings

Restore factory settings and delete all registered access. The factory code 123456 will be restored.

Unlock the unit and open the lid. Remove the battery cover and verify that there is power on the device. Locate the reset hole (between the battery sections).

Use the included reset pin and hold the reset button for about 5 seconds until you hear a long beep. Verify that factory code 123456# is restored.



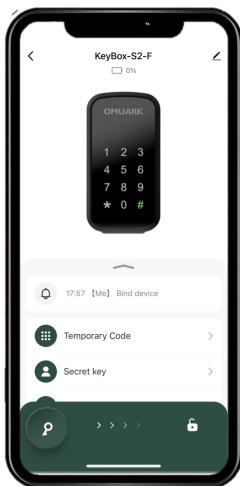

# APP function settings

## Connecting to the APP

>Scan the QR code to download the APP >Tap \* + 9 + \* + admin password + #,

>The Key Box is ready to pair.

>Enter the APP and click "+" to connect

## Temporary Code:

Custom: Online password setting

Time-Limited / one-off / Dynamic: Offline password setting

Clearing: Delete the Time-Limited code

## Secret key:

Set up Fingerprints (suitable for models with fingerprint function),

## Set up Passwords

## Set up NFC (Google wallet or Apple wallet unlock):

1. Scan the NFC card sticker to Google wallet or apple wallet on the phones, and save it as a virtual card.

One NFC card sticker can be connected to multiple phones at the same time.

( Note: Apple wallet function is based on local policies ).

2. Add the NFC virtual Card in the mobile wallet add to "Card add" according

## Multiple APP connections

Click "+", the master user can add or authorize other family members' APP to connect with this device. **Note**, that Bluetooth devices do not allow two or more applications to operate the product at the same time

## Remote Unlock:

Unlocking remotely when the key box is connected to the gateway.

## APP Restore factory settings

Enter the upper right corner of the APP main interface tap the "edit mark" first, and click "Disconnect and wipe data".

The Key box is disconnected from the APP, all registered access deleted.

The factory code 123456 will be restored.



Smart Life



TUYA Smart



OMCONNECT



OMUARK